
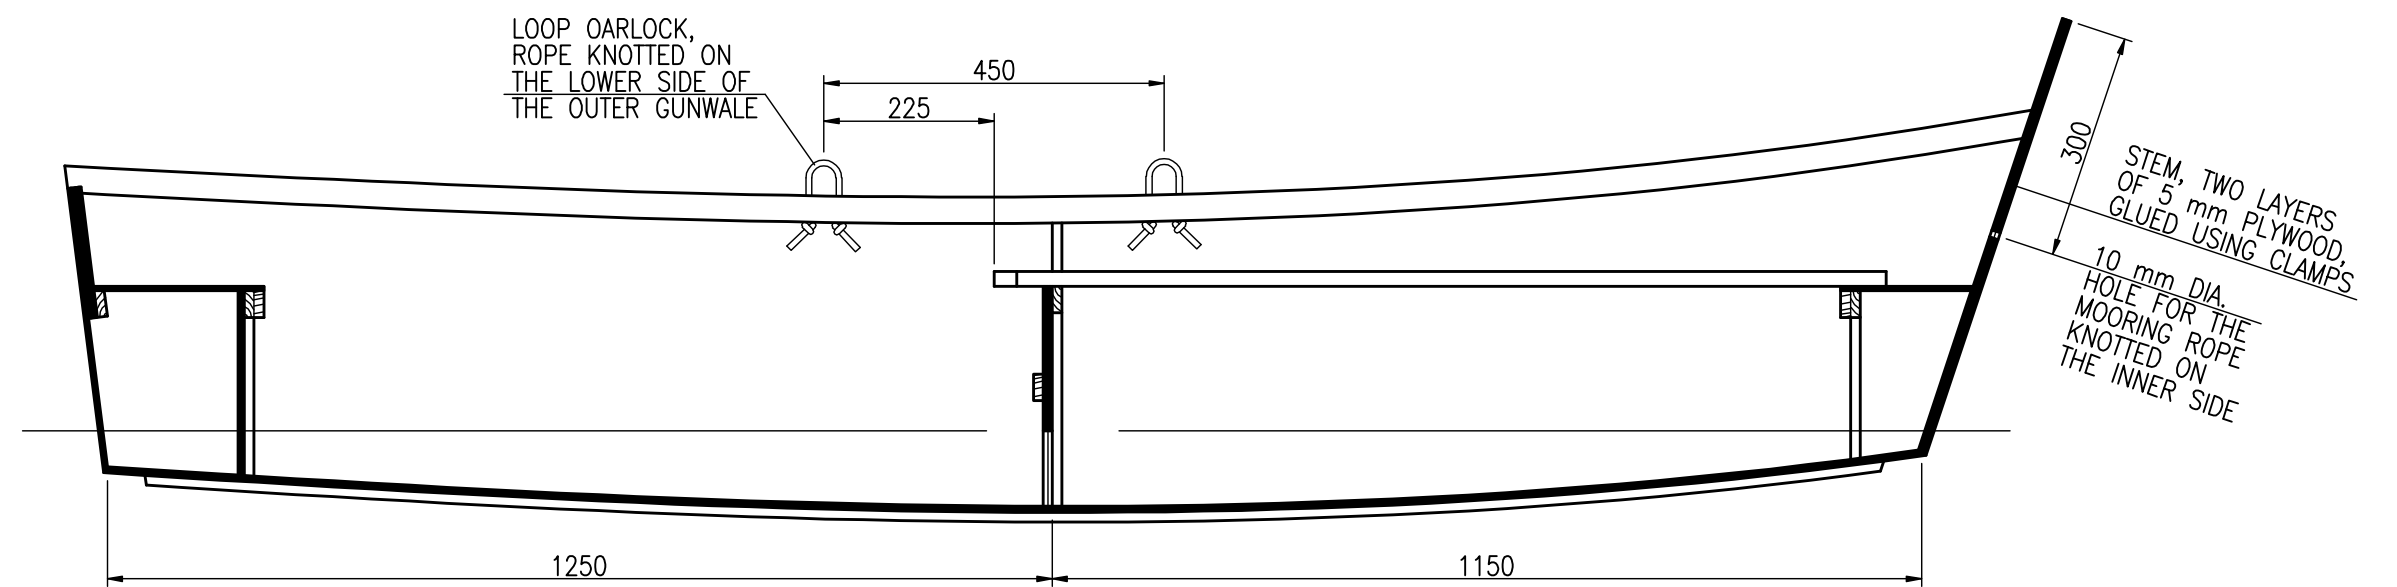
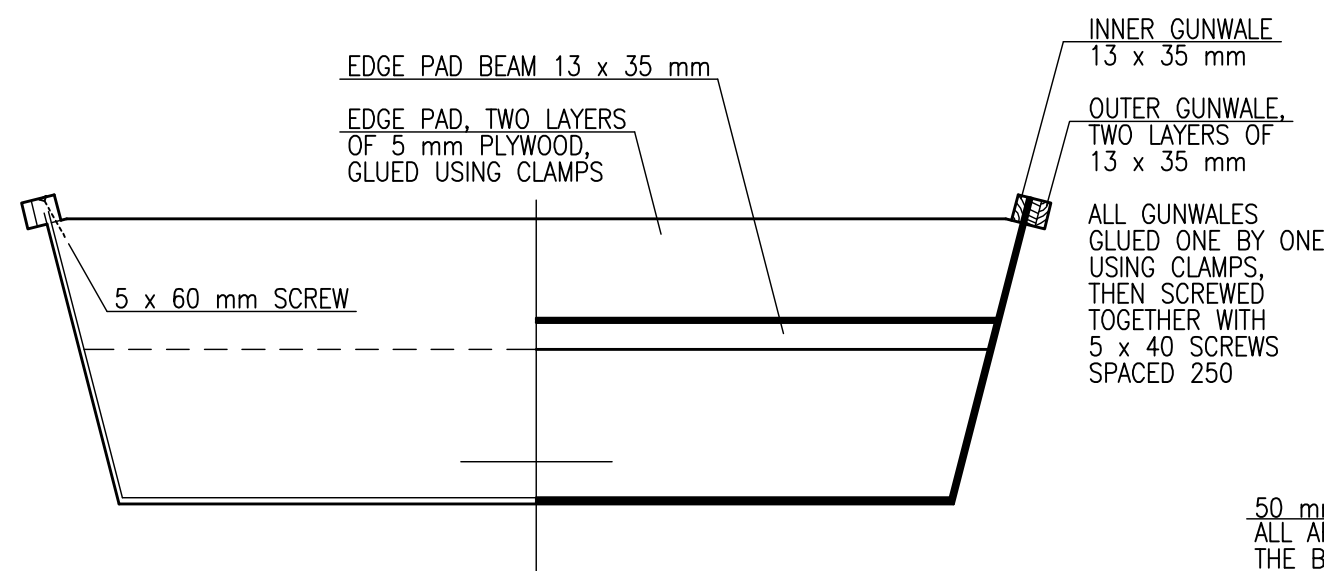
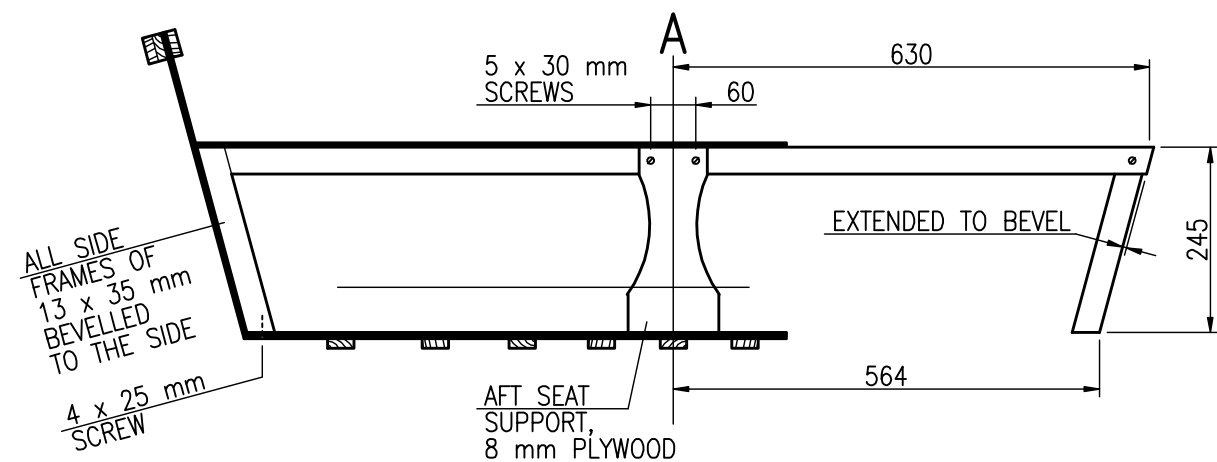



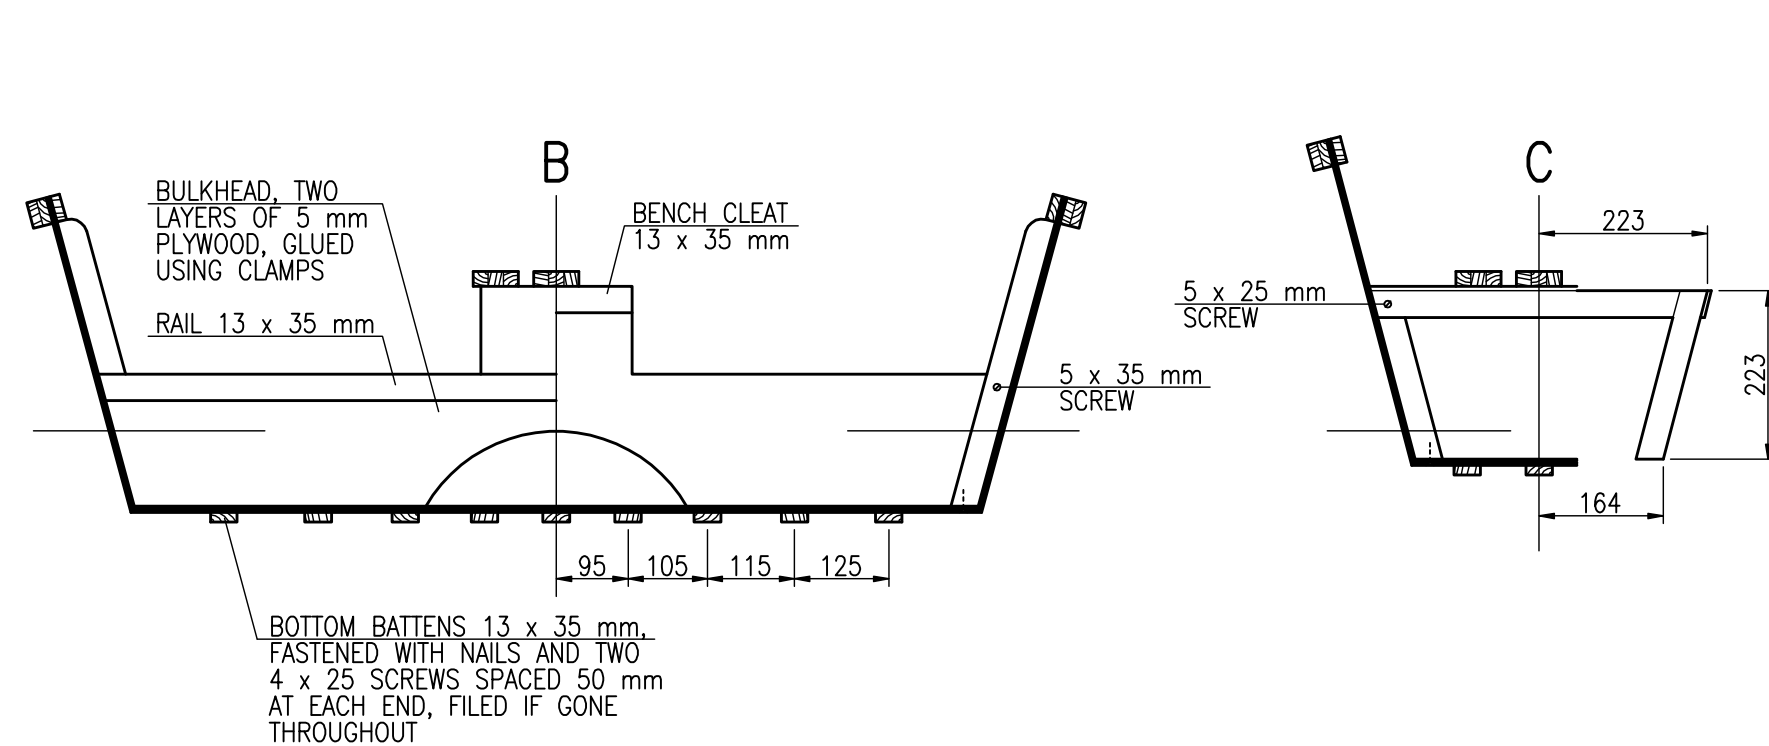


ALL OTHER PLYWOOD TO TIMBER JOINTS GLUED AND NAILED WITH 1.2 x 20 mm NAILS SPACED 50 mm

ALL NAILS OF BRASS. ALL SCREWS OF BRASS OR STAINLESS STEEL

ALL PLYWOOD TO PLYWOOD JOINTS WITHOUT TIMBER FIRST STITCHED WITH 1-1.5 mm COPPER WIRE, THEN TAPED BOTH SIDES WITH EPOXY OR POLYESTER RESIN AND ONE LAYER OF CHOPPED STRAND MAT EACH SIDE. MAT WEIGHT 450 g/m². MAT STRIPS WIDTH 100 mm

AFT AND FORWARD SEAT TAPED TO SIDES AND STEM UNDERSIDE ONLY

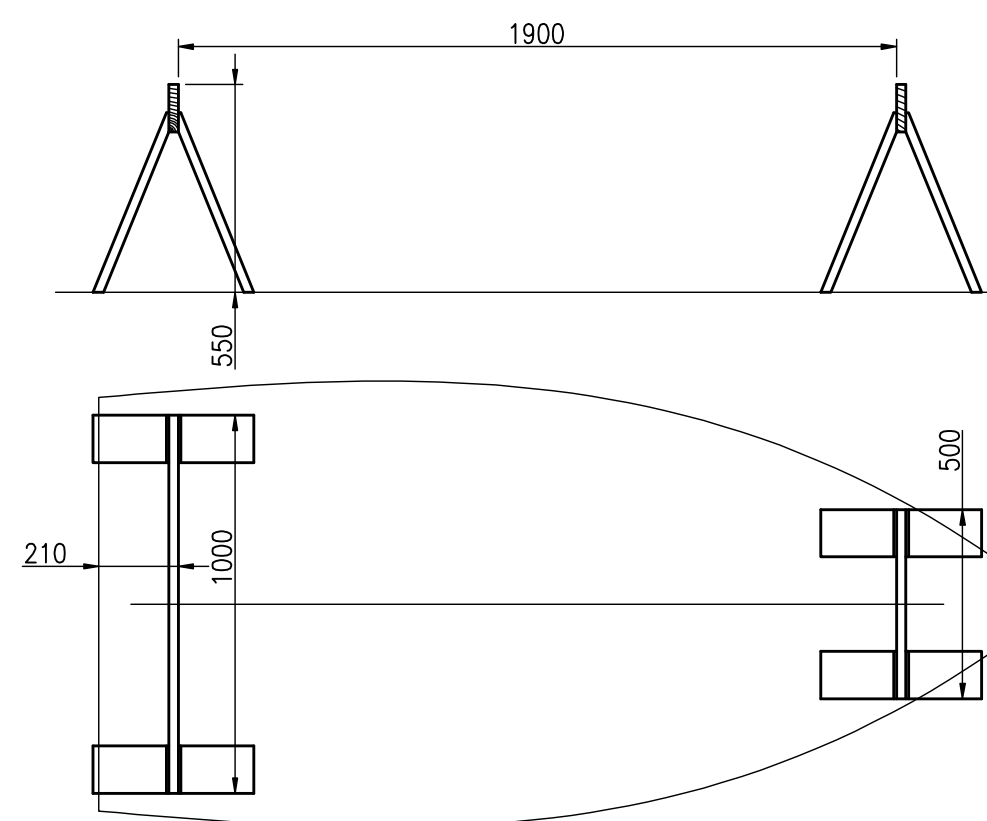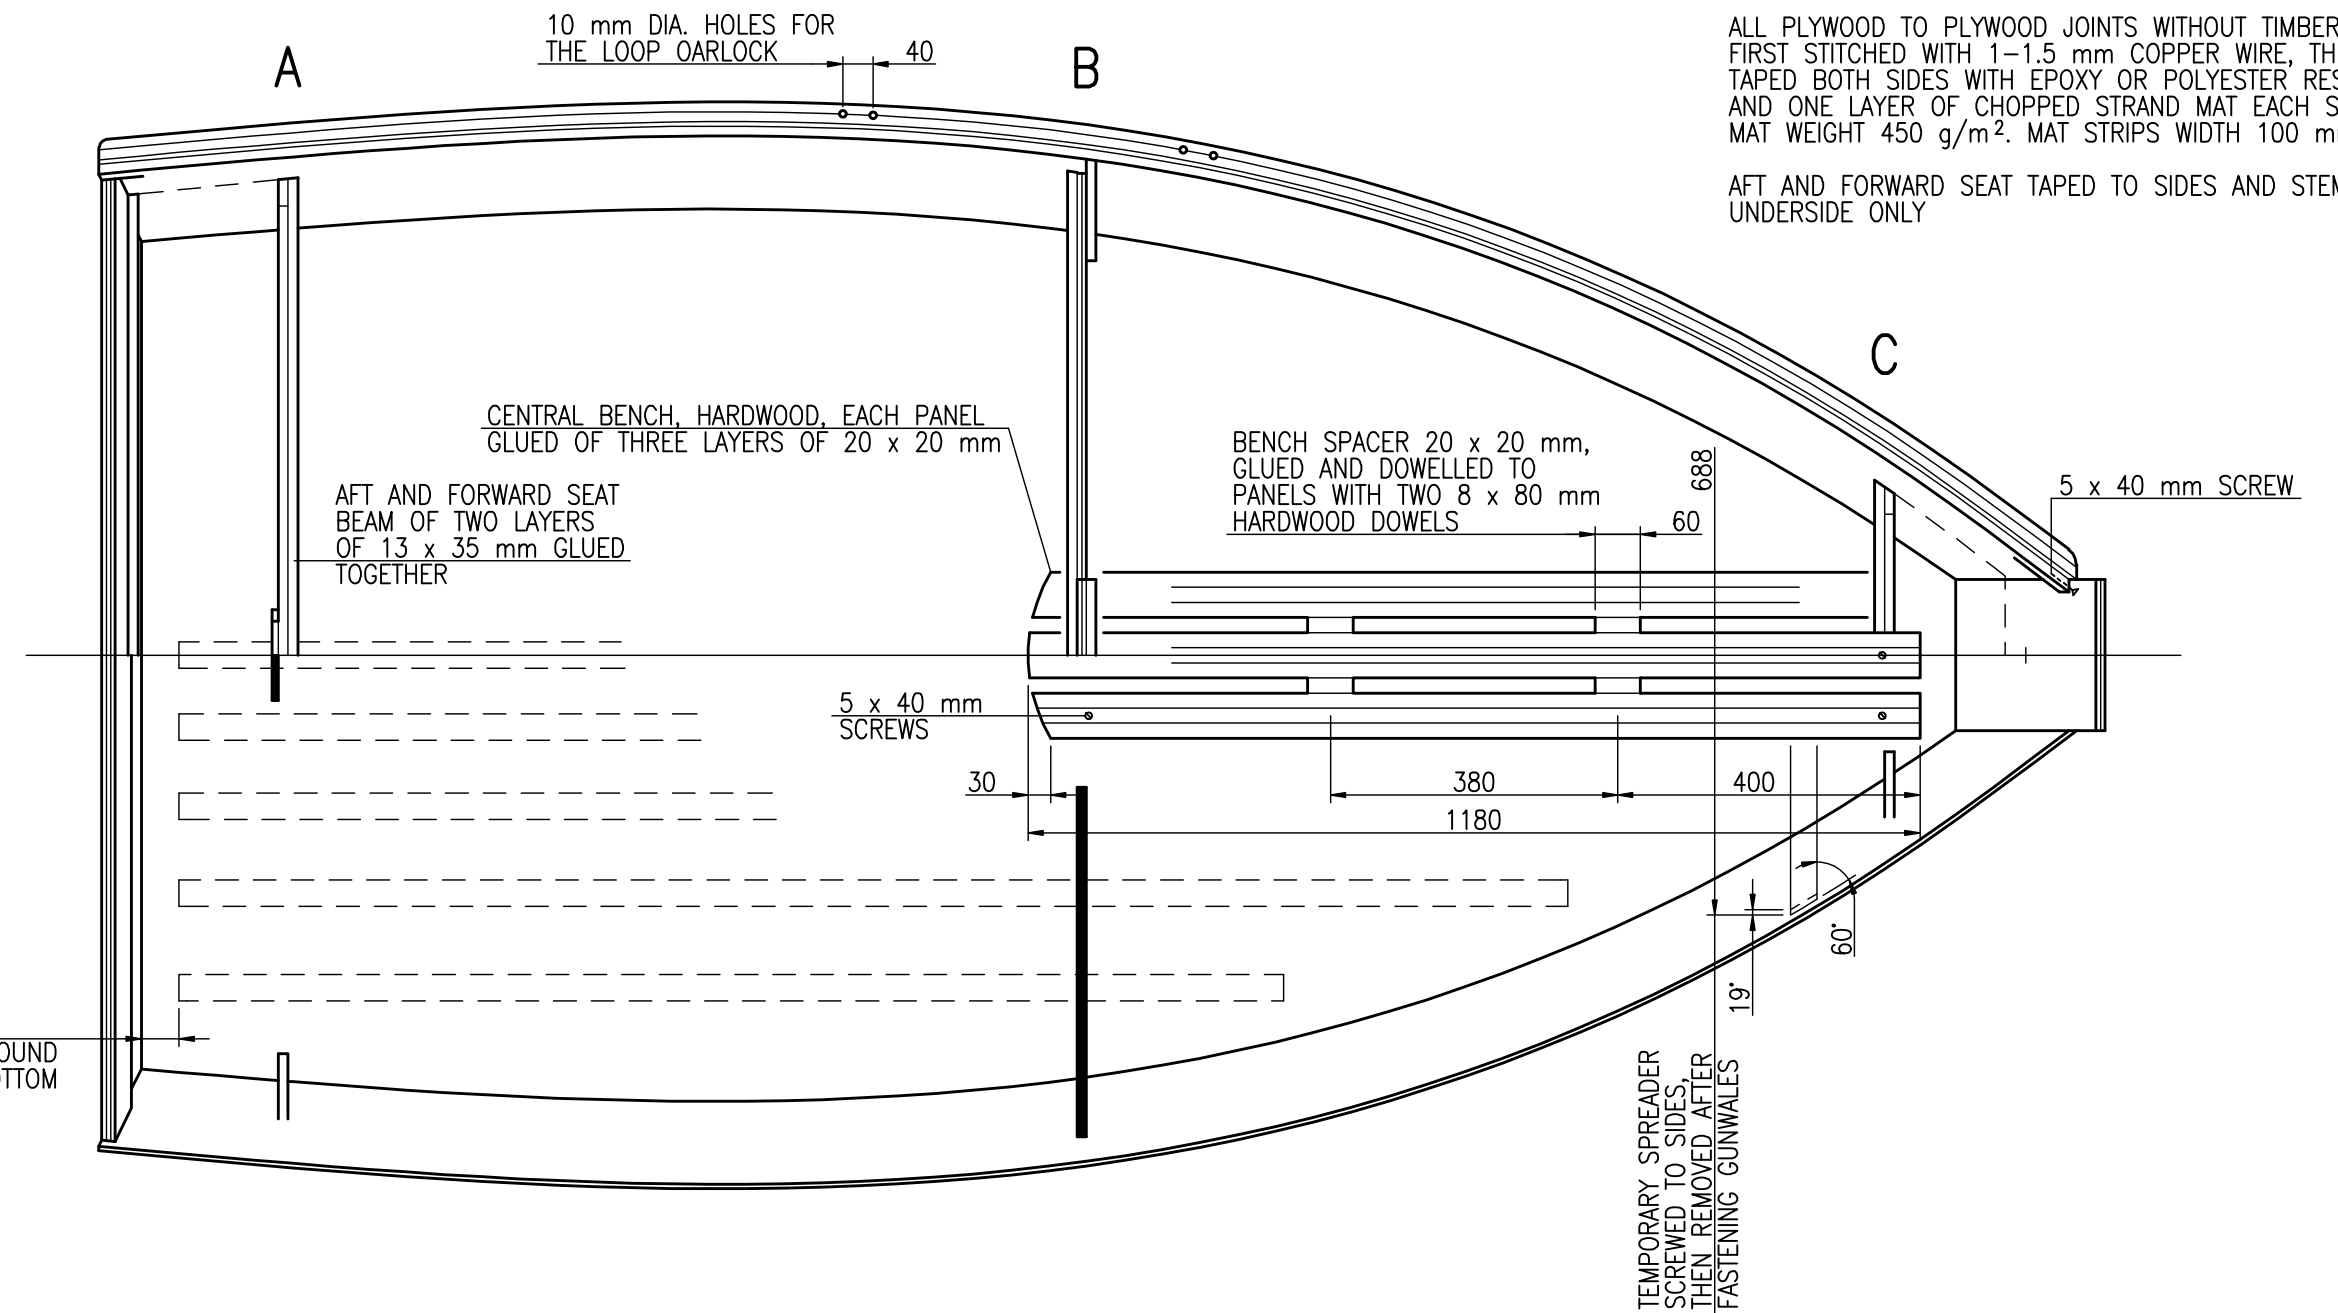

BUILDING STOCK
SCREWED OF LUMBER OR 22 mm PARTICLEBOARD RESAWN INTO 125 mm WIDE PANELS

BOTTOM SET UP ON THE BUILDING STOCK AND POSITIONED TO THE AFT EDGE, THEN TEMPORARILY FASTENED WITH TWO SCREWS TO EACH TRESTLE BEAM

MAIN DIMENSIONS

LENGTH OVERALL	L_{OA}	2.60 m
LENGTH OF WATERLINE	L_{WL}	2.40 m
BEAM	B	1.40 m
BEAM OF WATERLINE	B_{WL}	1.23 m
DRAFT	T_C	0.10 m
FREEBOARD AFT	F_A	0.35 m
FREEBOARD FORWARD	F_F	0.425 m
VOLUME DISPLACEMENT	V	0.20 m ³

plus

HULL CONSTRUCTION
SHEET 2/2, SIZE A2
SCALE 1:10, 1:20

RADOSŁAW WERSZKO
AUGUST 2026